

FEATURES OF SECURITY INTERCOM SYSTEM

- Inter Flat Communication.
- Flexible numbering as per flat number.
- Called number identification (Last 10 Calls)
- Tone & Pulse (DTMF & DECADIC) Dialing
- Independent wake up alarm facility for each flat.
- Barge-in from security & key personnel
- Extension to Flat call barring (No Man's Extension)
- Follow-me for calls to be re-directed
- All party conference
- Do not disturb
- Auto call back
- Auto redial of missed call
- Digital Real Time Clock at the Security / Lobby
- Calling number indication at security
- Call Forward indication at security
- Hotline between flat & security
- Paging Port Facility *
- Caller ID device interfacing*
- Automatic free line hunting

SECURITY FEATURES

- Cable tamper alert *
- Panic Alert Button *
- Electronic Door Sensor*
- Panic alert through code
- Super cross check / recheck of the visitor's credentials by security personnel
- Emergency alarm from any extn. to predetermined extensions
- Unique panic alarm to every flat by security in case of any emergency.
- Gas Leak Detector *
- Watch Man's Watch Dog

VOICE FEATURES

- President Broadcasting*
- Talking Caller ID*
- Vendor alarm with voice*

* Optional



SL-ALFA (Wall Mountable)



SL-GOLDLINE




SL-ONLINE



MULTI RANGE OF DIGITAL DISPLAY

SKYLINK EPAX SWITCHER
(Multi System Interconnecting Unit)

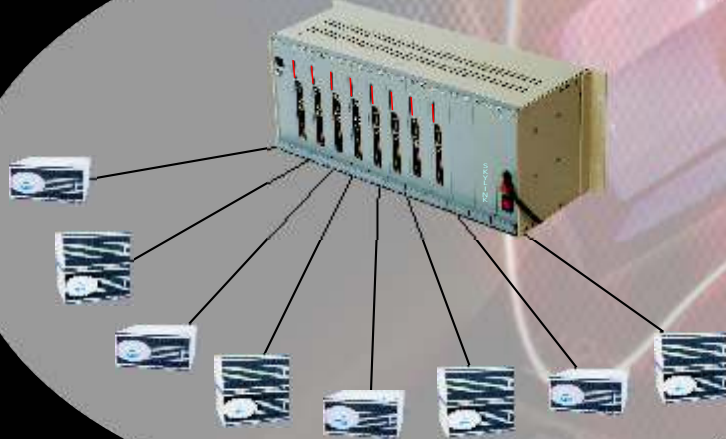

MAX UPTO 2040 LINES

TECHNICAL SPECIFICATIONS :

MODEL	SL-ALFA (Wall Mountable)	SL-GOLDLINE	SL-ONLINE
Capacity	64	128	255
Input Power	170 to 270 VAC 50Hz ± 10%	170 to 270 VAC 50Hz ± 10%	170 to 270 VAC 50Hz ± 10%
Line Voltage	24 VDC	48 VDC	48 VDC
Line Current	35 to 40 m AMP	35 to 40 m AMP	35 to 40 m AMP
Cabling	Single Pair 0.51 mm dia	Single Pair 0.51 mm dia	Single Pair 0.51 mm dia
Telephone	DTMF / DECADIC	DTMF / DECADIC	DTMF / DECADIC
Ambient Condition	0-45°C, 95% RH	0-45°C, 95% RH	0-45°C, 95% RH
Weight	7 kg.	14 . 5 kg.	24 kg.
Dimensions in cms (HxWxD)	41x30x8 cm 	21x45x40 cm 	42x45x40 cm

Specification subject to change without notice

SKYLINK COMMUNICATION

202, Ashok Service Indl. Estate,
Next to Shangrila Biscuit Co.,
L.B.S. Marg, Bhandup (W), Mumbai - 78.
Tel. : +91-22-2596 7138, 2596 3565
Mobile : 098204 31210, 093228 09992
E-mail : slinkcom@vsnl.com
Visit us : www.skylinkcommunication.com



Security At Your Finger Tip

New Vision of Digital Security

SKYLINK COMMUNICATION

Security At Your Finger Tip

Inter Flat Communication:

Flat owner can communicate with any other Flat owner by just dialing the respective flat number (extension number).



Talking Caller ID*:

This feature helps you to get callers identification through voice.



Wake Up Alarm:

Each extension can have their own morning alarm.



All Party Conference:

Unlimited extensions can be on conference at a time.



Cable Tamper Alert*:

Whenever your flat extension cable is tampered knowingly or unknowingly by a thief, immediately display will show your flat number with siren at the security.



Electronic Door Sensor Interface*:

If your flat is fitted with a door sensor, it will alarm when any unauthorized entry takes place.



President Broadcasting*:

Any message can be stored in the system, which will be announced to every extension as soon as extension goes off hook.



Vendor Alarm*:

This facility informs you the arrival / availability of vendor.



Gas Leak Detector*:

If your flat is fitted with gas leak detector then in case of any leakage of LPG(cylinder) or CNG(piped) gas it buzzes a alarm in the flat as well as at the security with your flat number flashing on the display.



Digital Real Time Clock at the Security / Lobby :

Display installed at the security will indicate extension number of the calling party as well as real time clock, when extension is free.



Paging Port*:

With the help of this facility you can broadcast any live message or you can page a particular person from your flat.



Caller ID Device Interfacing:

Any standard telephone instrument having CLIP (DTMF type) or separate Caller ID equipment can be connected to the extension, This will display the extension number from where you are getting the call.



Panic Alert Button*:

In case of extreme emergency you can press the panic button by which siren will buzz at the security with flat number on the display board.

